

FORTINO® The windproof one



Area of use



Type of fastening



Majorca



El Paradiso, St. Moritz



Restaurant Château Gütsch, Lucerne



Tuscany, Italy

In the lounge or at the bar: the little FORTINO® is there wherever you need shade. Thanks to its size, it can change location quicker than you can say Jack Robinson. The opposite servo principle means that it is easy to use: simply pull the tension lever down and clip it onto the slider. The frame is made from naturally anodized aluminium, with a two-part grooved pole. With its stable construction, the FORTINO® is wind resistant and can be fixed onto multiple bases or a floor fitting.

Material and technology

- Frame:** 8 rods made of natural anodized aluminium, 100 % inox, screws and rivets of high-grade steel, two-part profiled pole 38.4 x 2 mm, contrarotating opening system allowing for easy opening.
- Framematerial:** anodized natural
- Frameform:** round or square
- Shade cover:** self-tautening thanks to the flexible rod ends
material class 5 (100 % polyacrylic approx. 300 g/m²)
material class 4 (100 % polyester approx. 250 g/m²)
material class 2 (100 % polyester approx. 220 g/m²)
- Flounce:** not available

- Protective cover:** optional
- Total height closed:** 280–305 cm
- Height open:** 245–265 cm
- Wind:** max. wind speed open perm. 80 km/h
- UV protection:** depending on colour ≥ 98 % (based on test results of "Swiss Quality Testing Services")
- Light fastness:** material class 4 and 5 = Level 7–8
- Water pressure:** material class 4 = water column 100 mm
material class 5 ≥ water column 300 mm (depending on colour)

Assortment

	Nominal size	Lateral distance	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open perm.	Order no. Frame anodized natural
	cm	cm	m ²	cm	cm	cm	cm	cm	kg	km/h (wind force)	
	A	AS	B	E	F	G	H	C			
○	∅ 250	230	4.4	155	205	290	260	60×60	55	80 (9)	310 00 250 171
	∅ 300	275	6.4	140	205	305	265	70×70	70	60 (7)	310 00 300 171
□	200×200	-	4.0	130	205	280	245	60×60	55	70 (8)	310 00 201 171
	240×240	-	5.8	115	205	295	250	70×70	70	60 (7)	310 00 241 171



⁹8 parts

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).


Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.

In the presence of several sunshades, the minimum distance between one sunshade and another and between sunshades and walls shall be 20 cm.

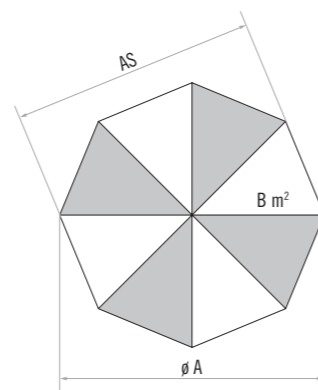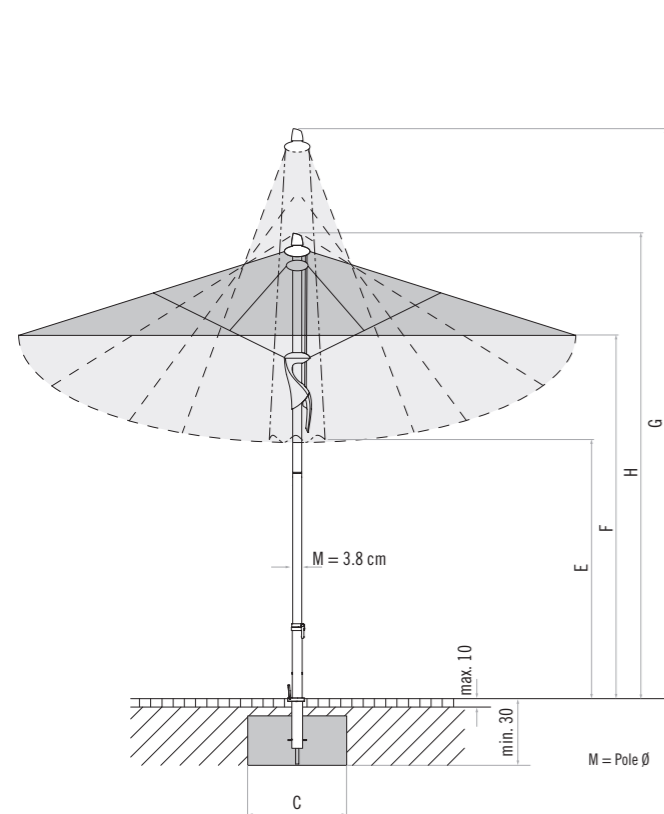

8 parts



8 parts

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), water outflow

Accessories

	Order no.
Fixing option Z (support tube Z absolutely necessary)	
1. Concrete base Z, 55 kg, Ø 60×11 cm	350 01 109 528
1. Concrete base Z, 70 kg, Ø 75×9 cm	350 01 109 527
2. ³ Granite base Z, 55 kg, 55×55×9 cm, natural stone, with castors and retractable handle	350 01 109 440
3. Steel base Z, 40 kg, 58.5×58.5×2 cm, galvanised steel	350 01 100 210
Add-on weight 30 kg, 57.5×57.5×1.7 cm, galvanised steel	350 01 100 310
4. Wall bracket Z, 180 mm, galvanised steel	350 01 205 000
5. Support tube Z, Ø 35/38 – 39 mm, galvanised steel	350 01 201 010
5. Support tube Z, Ø 35/38 – 39 mm, high-grade steel 1.4301/304	350 01 201 100
³ Base with castors Z (support tube Z absolutely necessary)	
6. Base with castors Z, 55 kg, 65×65×11 cm, cast concrete decor	350 01 102 900
6. Base with castors Z, 90 kg, 80×80×12.5 cm, cast concrete decor	350 01 102 800
³ Base with castors (Weight set absolutely necessary)	
7. Base frame with castors 60 kg, Ø 61×12 cm, anthracite, with support tube Ø 35/38 – 39 mm, polished aluminium (Base frame ca. 17 kg)	350 01 102 400
Weight Set, 4 pieces 35001105400, concrete, for base with castors 60 kg (Weight Set ca. 43 kg)	350 01 103 400
Protective cover for base with castors 60 kg	350 01 602 400
Fixing option BT (Connection tube BT absolutely necessary)	
8. Ground socket BT, galvanised steel	350 01 206 100
9. Connection tube BT, Ø 35/38 – 39 mm, galvanised steel	350 01 206 210
Protective cover, coated polyester fabric	
10. Protective cover with zip and rod	350 01 609 971
10 pieces, protective cover with zip and rod	350 01 609 973

³only suitable for smooth, joint free surface coverings

